

Folding ladder with platform - Accessible from one side

Conforming to EN 131 standard

Entirely in aluminium

Cross-bar to avoid oscillations, 60x20 uprights and holding belt for maximum stability

Replaceable steps width 80 mm, **reinforced with device to prevent overturning** and fixed with self-locking screws

Platform dimensions 270x300 mm with non-slip rubbered surface - Feet in non-slip rubber

Width closed 90 mm - **Max capacity 150 kg**

| Number of steps | 6 | 10 |
|------------------------|-------------|-------------|
| Code | N 9009 0006 | N 9009 0010 |
| N 9009/0 Each € | | |
| Height platform m | 1,27 | 2,11 |
| Closed height m | 2,08 | 3,00 |
| Working height max. m | 3,27 | 4,11 |
| Weight kg | 9,5 | 14 |



Type with self-braking trolley - Solid, compact and strong structure

In painted steel tube - Gray RAL 7000

With **system for locking the position**, as soon as the operator steps on it; the ladder can be moved again, by pressing the unlocking pedal

6 non-slip, corrugated, aluminium steps, central support surface, 0,92 m above the ground, and wide upper platform, 1,4 m above the ground - With 4 rubber wheels Ø 80 mm

| | |
|------------------------|------------------------|
| Total height m | 2,45 |
| Working height max. mm | 1400 |
| Base dimensions mm | 670x1070 |
| Max. capacity kg | 150 |
| Code N 9009 1000 | N 9009/1 Each € |



Platform type - Solid, compact and strong structure

Entirely in aluminium - Not-folding

Max security non-slip, corrugated steps 130 mm wide, **reinforce joints as well as front and side guardrail to avoid falls**

Platform with raised edges to avoid feet slipping and tray for tools

Floor standing on 4 feet, including 2 rubber-coated

The 2 wheels can move only when the ladder is lifted

| Total height m | 2,5 | 3 |
|------------------------|-------------|-------------|
| Code | N 9009 4025 | N 9009 4030 |
| N 9009/4 Each € | | |
| Top height m | 1,5 | 2 |
| Working height m | 3,5 | 4 |
| Base dimensions LxS mm | 1320x770 | 1580x870 |
| Weight kg | 20 | 24 |

As these items are particularly bulky, a packing and delivery fee will be applied

ABC STORAGE Safety platform for forklift trucks

Conforming to 89/392/EEC Directive

To be used with forklift trucks

Suitable for non-routine maintenance works providing maximum safety and reliability

In high strength painted steel sheet metal - RAL 2004 orange


Platform with non-slip, anti-static rubber mat with tool container

Inward opening door with safety latch - **Non-removable security pin**

Hooks for safety belt loops are available upon request (not supplied)

| | |
|-------------------|-------|
| Capacity kg | 250 |
| Empty weight kg | 133 |
| Dimension LxDxh m | 1x1x2 |

Platform dimensions

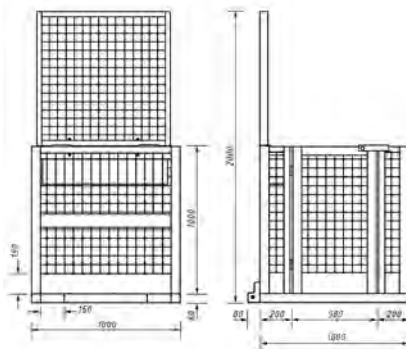

| | |
|------------------|------------------------|
| Code N 9009 9000 | N 9009/9 Each € |
|------------------|------------------------|

